




C150D6

Industrial Range Powered By Cummins

SM Power Solutions

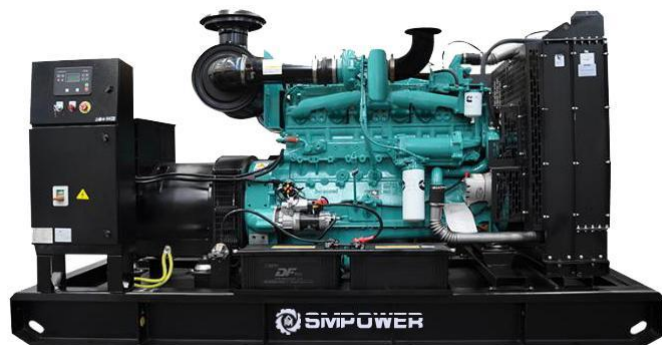

Standards : 2006/42/EC Machinery safety, 2006/95/EC Low voltage, EN 60204-1 : 2006+A1 : 2009, EN ISO 12100 : 2010, EN ISO 8528-13:2016, EN ISO 13849-1: 2015, EN 60204-1: 2018

PRP: Prime power is available for an unlimited number of annual operating hours in variable load applications , in accordance with ISO 8528-1.

ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. overload is not allowed.

Conditions : According to the standard, the nominal power assigned by the genset is given for 25° C air inlet temperature, of a barometric pressure of 100 kPa (100 m A.S.L), and 30 % relative humidity.

GENERATOR SPECIFICATION

ITEMS	PRP	EPS
Power	150kVA	165kVA
Power	120kW	132kW
Frequency / Phase / Power factor	60Hz / 3P / PF0.8	
Standard voltage	220/127V	
Available voltage	240/138V	



Water-cooled



Three Phase




60Hz



Diesel

GENERAL INSTALLATION

ITEMS	OPEN	SILENT
Dimension(L*W*H) (mm)	2300*960*1515	3200*1100*1750
Weight(kg)	1250	1750
Fuel tank(L)	270	350
Sound pressure level @75% load&1m dB(A) @75% load&7m dB(A)	TBA TBA	



NOTE: Weights and dimensions based on standard products. According to 2000/14/CE , sound data is provided at 7m for 75% prime power. For actual installation, please contact the manufacturer.

PERFORMANCE DATA		
Engine brand	CUMMINS	
Engine model	6BTAA5.9-G2	
Fuel	Diesel	
Aspiration	Turbocharged and Charge Air Cooled	
Cooling	Water-cooled	
Governor	Electronic	
Cyl arrangement	6L	
Application	Prime & Standby	
Fuel consumption	100% ESP(L/H)	38
	100% PRP(L/H)	34
	75% PRP(L/H)	25
	50% PRP(L/H)	18

ENGINE SPECIFICATION

BASIC DATA	
Engine brand	CUMMINS
Engine model	6BTA5.9-G2
Displacement	5.9L
No. of cyl / arrangement	6L
Bore x stroke	102x120mm
Compression ratio	17.3 : 1
Engine speed	1800rpm
Engine type	4-stroke diesel

EXHAUST SYSTEM	
Exhaust stack gas temperature (max.)	570 °C
Exhaust gas flow rate (max.)	401 L/S
Exhaust system backpressure (maximum allowable)	10 kPa

FUEL SYSTEM	
Maximum restriction at lift pump	13.6 kPa
Max. fuel flow	30 L/H

COOLING SYSTEM	
Radiator air flow	348 m³/min
Total oil capacity	16.4L
Total coolant capacity	26.4L

ELECTRICAL SYSTEM	
Starter motor rated voltage	DC24V
Start battery	2x60Ah(580CCA)
Battery charging alternator	DC24V/40A

INLET AIR	
Air filter	Dry type
Max. combustion air Intake restriction	6.0kPa
Combustion air inlet flow rate	142 L/S
Max. allowable combustion air inlet temp	50°C

ALTERNATOR SPECIFICATION

BASIC DATA		ALTERNATOR BRAND : LEROYSOMER	
Insulation & temperature rise	Class H/H	Type	Brushless
Excitation type	Self-excited	No. of bearings	Single bearing
Winding leads	12	Coupling system	Flexible disc
Winding connections (standard)	Star	Maximum over speed	2250 RPM
Winding pitch	Two thirds	Coating type	Vacuum impregnation
Number of phase	Three phase	IP rating	IP23

CONTROL SYSTEM

Key features

Single generator set control-
ler can be used in prime or
standby scenarios



Manual and remote start,
MRS application



Auto mains failure, AMF
application



Genset power/frequency/fac-
tor /voltage/current detection



Engine / alternator / genera-
tor protections, emergency
stop




Event log / running hours
history / maintenance
warning, LCD screen



User access management,
software and tools are easy
to use



Input or output configuration,
USB communication port

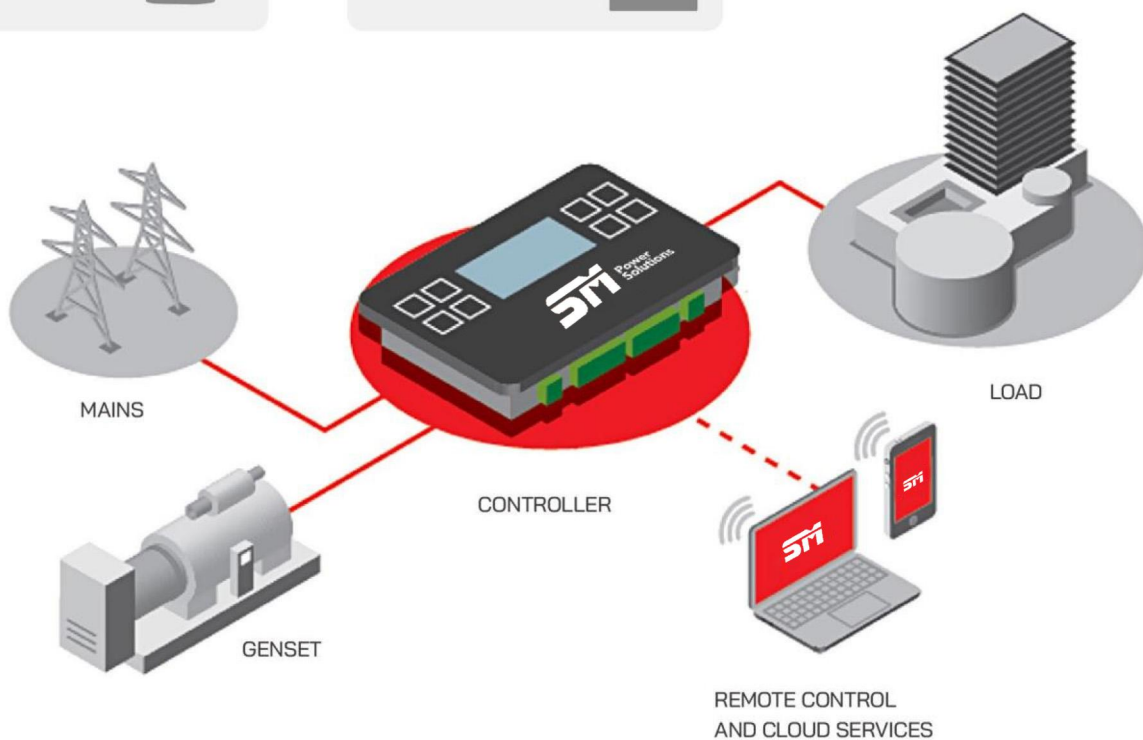

GENSET VERSION

STANDARD FEATURES

- ♦ Diesel engine, 50 degrees radiator, brushless alternator
- ♦ Intelligent controller
- ♦ Output circuit breaker (up to 1250A)
- ♦ Maintenance-free start battery, battery charge, battery switch
- ♦ Steel industrial silencer, exhaust bellows and elbows
- ♦ Steel chasis and anti-vibration shock absorbers
- ♦ Lifting and moving structure, expansion of oil and coolant discharge
- ♦ Moving parts protection, hot parts protection
- ♦ Special toolbox, delivery attached documentation



OPTIONAL FEATURES

ENGINE

- ♦ Water jacket preheater
- ♦ Oil Preheater, oil level maintainer, oil manual pump
- ♦ Heavy air filtration
- ♦ Residential silencer
- ♦ Remote radiator, heat exchanger

ALTERNATOR

- ♦ PMG/AREP excitation system
- ♦ Anti-condensation heater
- ♦ Winding/bearing RTD
- ♦ Double bearing structure
- ♦ IP44 protection class

CONTROL SYSTEM

- ♦ Synchronizing panel, remote control panel
- ♦ RS232/485, 4G & GPS wireless, ethernet communication card
- ♦ Additional digital/analog input/output
- ♦ Monitoring software, mobile APP
- ♦ Ni-Cad batteries

GENERATING SET

- ♦ External fuel tank, automatic fuel feeding
- ♦ ATS/output /combining/distribution cabinet
- ♦ Load test cabinet
- ♦ Mobile trailer
- ♦ Customized design

Tel: +966 55 713 0265 Fax: +86 591 8639 6929
Email: Info@smpowersa.com Web: www.smpowersa.com

-  Follow us @SMPower
-  Follow us @SM Power Group
-  Follow us @SM Power Group

